

# MDC

# ICE FOG



## THE LOW FOG GENERATOR

- *Produces the DENSEST Low Fog*
- *Adjustable Low Fog output*
- *Lowest fluid consumption*
- *Optional 2-Channel DMX Interface*
- *Using refrigerated liquid CO<sub>2</sub> as a coolant and as a propellant*
- *Self contained unit on wheels*
- *75% Quieter than the Ice Fog Touring*
- *Compartments for accessories*




# TECHNICAL DATA :

## ICE FOG Q

<b>Fluid consumption:</b>	0,09 L (3 oz) per minute / 5.4 L (1.53 US gal.) per hour at maximum output This Low Fog Generator has a 2.5 litre (0.66 US gal) fluid reservoir
<b>Fog color:</b>	Pure white
<b>Particle size:</b>	0,5 - 4,5 microns
<b>Fluid type:</b>	MDG Low Fog Fluid Only M.S.D.S. available on request
<b>Liquid CO<sub>2</sub> type:</b>	Low pressure refrigerated liquid CO <sub>2</sub> (DEWAR)
<b>Liquid CO<sub>2</sub> consumption:</b>	3 L (6.8 lb) per minute at 1500 kPa (225 psi)
<b>Liquid CO<sub>2</sub> operating Pressure:</b>	1500 kPa (225 psi) $\pm$ 10%
<b>Liquid CO<sub>2</sub> operating time:</b>	180 litres (48 US gallons) Dewar will last approximately 60 minutes
<b>Operating voltage:</b>	208 VAC 1Ø or 230 VAC, 50/60Hz.
<b>Power consumption:</b>	2850 Watts
<b>Warm-up time:</b>	Approximately 7 minutes
<b>Dimensions:</b>	Total length: 1,71 m (67 3/8") Operating length: 1,51 m (59 1/2") Width: 67 cm (26 3/8") Height: 78 cm ( 30 5/8")
<b>Weight:</b>	113 kg (250 lb)
<b>Approval:</b>	CE approved, CSA and UL pending

Delivered with a Remote Control (8 m (26 ft) 5-pin XLR Extension cable), a 2.5 m (8') long X 23 cm (9") diameter Output Fog Hose and a 3 m (10') Input low pressure Liquid CO<sub>2</sub> Isolated Hose.

The manufacturer has the right, without notice, to modify and improve his products as he deems necessary

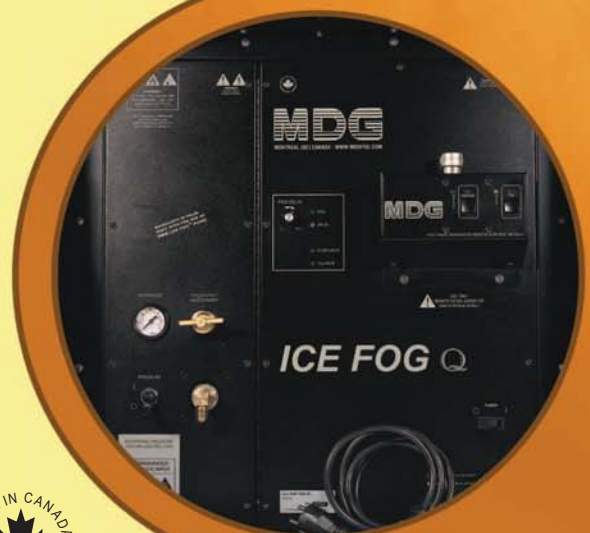

**Les Générateurs de Brouillard MDG Ltée / MDG Fog Generators Ltd**  
5639 Christophe-Colomb, Montréal, QC Canada H2S 2E8  
Tel: 514-272-6040 / 800-663-3020 • Fax: 514-722-3229  
www.mdgfog.com • E-mail: info@mdgfog.com



Rev.: D0